MultiCoat-SP

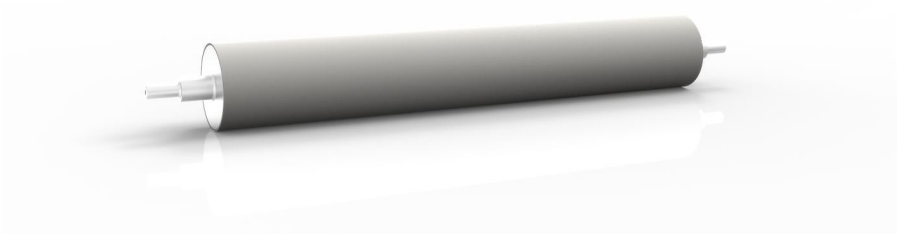

Тип покрытия:	Резина	
Возможное назначение:	Wood and wood laminate, PVC flooring production : varnishing rollers, glue applicators Conversion of paper and film – adhesive and release stock : primer, glue and silicone applicator rollers and sleeves All converting of (printed) paper, board, film and flexible packaging : applicator, coater and (UV) varnishing rollers and sleeves, backing rollers and sleeves	
Диапазон твердости:	30, 40, 50, 60, 70 Shore A	
Доступные цвета:	серый	
Рекомендуемая толщина покрытия:	мин. 15 mm - макс. 30 mm	
Температурная стойкость:	сухие условия: влажные условия:	постоянно 80°C / пиковые значения 110°C постоянно 90°C / пиковые значения 125°C
Характеристики и преимущества:	Good physical properties Excellent resistance to polar solvents (MEC, acetates, alcohols…) Very good surface wetting and transfer properties High purity and homogeneity	
Химическая стойкость:	Кислотные растворы: Щелочные растворы: Горячая вода и пар: Озон: Смазочные материалы: Ароматические растворители (толуол, бензол, ...): Хлорированные растворы: Полярные растворители(МЕК, ацетон,...):	Очень хорошо Очень хорошо Очень хорошо Отлично Не подходит Не подходит Не подходит Отлично
Рекомендуемые средства очистки:	(Warm) water, soap, detergent, acid/alkaline cleaners, polar solvents : MEK, alcohol, acetate...	

HANNECARD
YOUR ROLLER EXPERT